




## China Abec 9 Bearing Supplier

### NTN Miniature Bearing 696ZZ ball bearing OPEN ZZ Deep Groove ball bearing

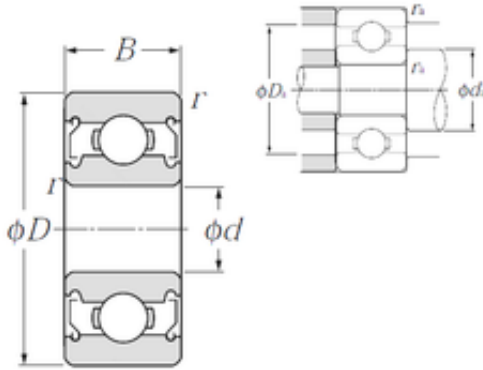

696ZZ Bearing 2D drawings and 3D CAD models

Bearing No. 696ZZ

Size	6x15x5 mm
Bore Diameter	6 mm
Outer Diameter	15 mm
Width	5 mm
d	6 mm
D	15 mm
B	5 mm
C	5 mm
r min.	0,2 mm
da min.	7,6 mm
da max	7,8 mm
Da max.	13,4 mm
ra max.	0,2 mm
Weight	4,3 Kg
Basic dynamic load rating (C)	1,35 kN
Basic static load rating (C0)	0,53 kN
(Grease) Lubrication Speed	37 000 r/min
Category	Single Row Ball Bearings
Inventory	2.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.004
EAN	4547359661132
Product Group	B00308
Enclosure	2 Metal Shields



## China Abec 9 Bearing Supplier

Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	6MM Bore; 15MM Outside Diameter; 5MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Manufacturer Item Number	696ZZA/5K
Weight / LBS	0.009
Outer Race Width	0.197 Inch   5 Millimeter
Bore	0.236 Inch   6 Millimeter
Outside Diameter	0.591 Inch   15 Millimeter
Other Features	Deep Groove   Shell Alvania Prelubricated
Inner Race Width	0 Inch   0 Millimeter
bore diameter:	6 mm
precision rating:	ISO Class 0
outside diameter:	15 mm
finish/coating:	Uncoated



## China Abec 9 Bearing Supplier

overall width:	5 mm
bearing material:	High Carbon Chrome Steel
bore type:	Round
cage material:	Steel
closure type:	Double Shielded
inner ring width:	5 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	5 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	37000 rpm
internal clearance:	CN
fillet radius:	0.2 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	44000 RPM
dynamic load capacity:	1350 N
series:	69
static load capacity:	530 N
manufacturer product page:	<a href="#">Click here</a>